


Ohmite's Four Terminal Bare Element Resistors provide ultra low resistance values (to 0.0005Ω) for relatively high current requirements, with the advantages of a Kelvin configuration and PC Board mounting capability.

These shunt resistors are specifically designed for use in a Kelvin configuration, in which a current is applied through two opposite terminals and sensing voltage is measured across the other two terminals.

The Kelvin configuration enables the resistance and temperature coefficient of the terminals to be effectively eliminated. The four terminal design also results in a lower Temperature Coefficient of Resistance and lower self heating drift which may be experienced on two terminal resistors. The requirement to connect to the terminals at precise test points is eliminated, allowing for tighter tolerancing on the end application.

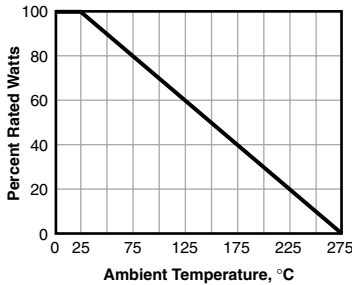

## FEATURES

- Ideal for current sensing applications
- 1% tolerance standard, others available
- Low inductance (non-inductive below 0.05Ω)
- RoHS compliant
- Radial, self-supporting, design is ideal for PC board mounting
- High Power-to-size ratio
- Decimal marked, silicone coated (650 Series only)

## SPECIFICATIONS

### Material

**Terminals:** Tinned Copper  
**Resistive element:** Manganin Alloy

### Electrical

**Operating Temperature Range:** -55°C to +275°C.

**Temperature Coefficient of Resistance, 0°C to 85°C:** ±50 PPM/°C, .015Ω and higher ±100 PPM/°C, .015Ω and lower

**Environmental Performance:** Exceeds the requirements of MIL-PRF-49465

**Power rating:** Based on 25°C free air rating

**Overload:** 5 times rated wattage for 5 seconds



**Thermal EMF:** Less than ±3μV/°C

**Derating:** Linearly from 100% @ +25°C to 0% @ 275°C



# 60 Series

## Four Terminal Bare Element

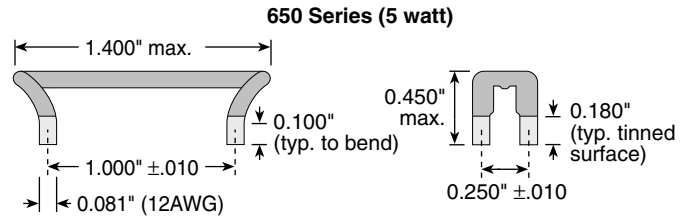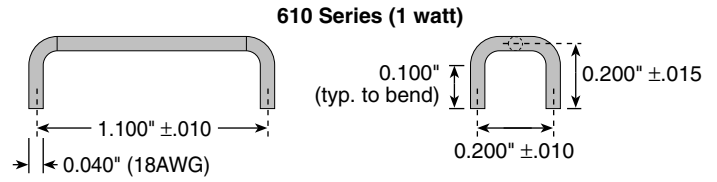

Series	Wattage	Resistance Range (Ω)*	Amps max.	Tolerance*
610	1W	0.002-0.050	32	1%
650	5W	0.002-0.005	100	1%

\*Standard; others available

## ORDERING INFORMATION

Terminals  
 Blank = 2 terminals  
 P = 4 terminals

RoHS Compliant

**6 1 0 F P R 0 5 0 E**

60 Series | Tolerance F = 1% D = 0.5% | Ohm Value Example: R050 = 0.05Ω

Wattage  
 10 = 1.0  
 50 = 5.0

Check product availability at [www.ohmite.com](http://www.ohmite.com)

## STD. PART NUMBERS

Ohmic value	610 Series 1 watt	650 Series 5 watt
0.002	610FPR002E	650FPR002E
0.005	610FPR005E	650FPR005E
0.010	610FPR010E	-
0.015	610FPR015E	-
0.020	610FPR020E	-
0.025	610FPR025E	-
0.036	610FPR036E	-
0.050	610FPR050E	-

**Our Tech Center is open 10am to 2pm CT Tuesdays and Thursdays, just call 866-9-OHMITE**