

To Do
- change opamps, OPx27 has 0.5V/uS and +4mA outputs.


CASE	1598CGY Hammond
POWER	EPS120050-P7P CUI
FILTR	LFB143064-000 Laird Tech
GRMMT	731 or 736 Keystone

NOTES

- 1) Electrolytics are all 22uF/16V, Kemet A700D226M016ATE018.
- 2) Ceramics are all 0.1uF X7R or C0G.
- 3) Measured 300mA from 12V with all outputs at zero.

Quad Analog Isolator 2:File

A1	Sep'12	A.Stummer	Original, as first designed
Ltr	Date	By	Description
REVISIONS			
University of Toronto Quantum Optics Group			Quad Analog Isolator 2
Drawn: A. Stummer Sept 2012			J.Thywissen Labs
Edited: 11/10/2012 15:53:35			Sheet: 1/3
			REV: A1

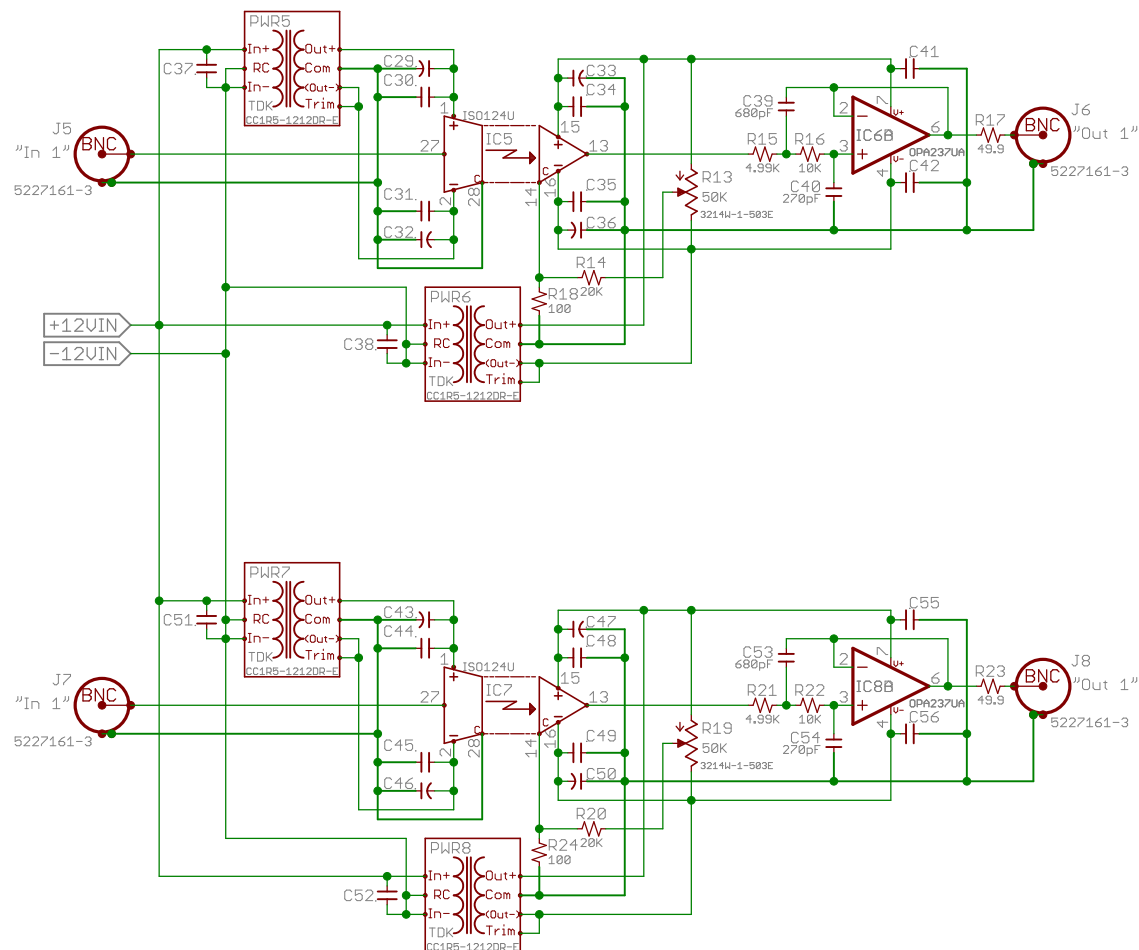


University of Toronto
Quantum Optics Group

Quad Analog Isolator 2

Edited: 11/10/2012 15:53:35

Sheet: 2/3

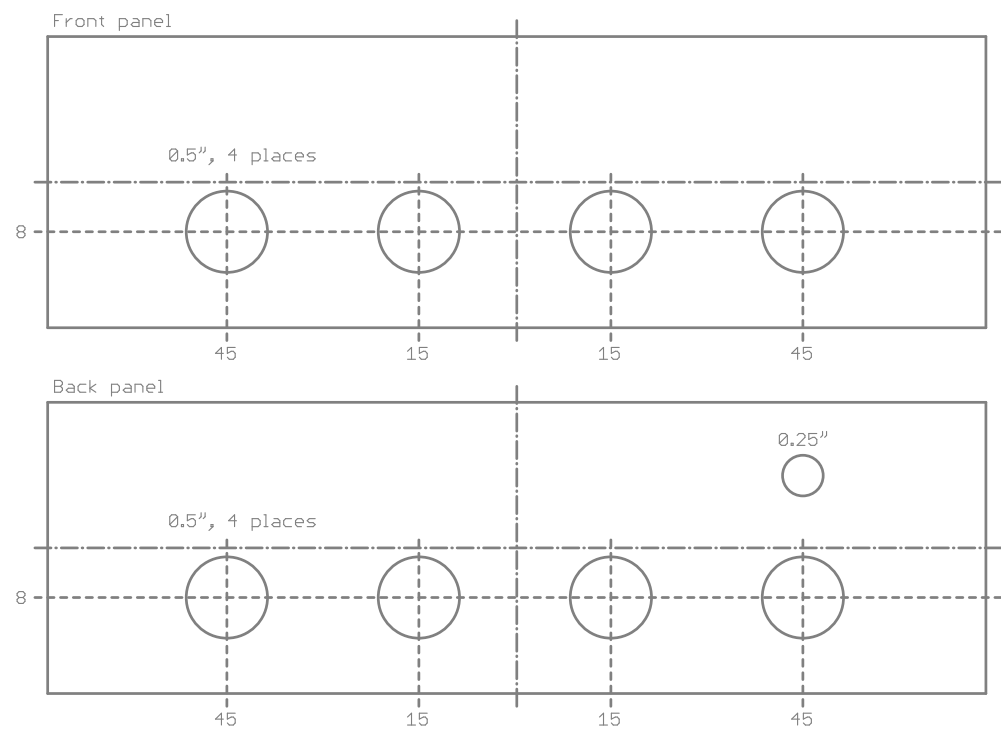

Front decal



Quad Analog Isolator 2

University of Toronto, J. Thywissen Labs

